

**Lhermite®**  
**PUNCHING**

**EPX 700**


**HEAVY DUTY MULTI-PUNCH MACHINE**



The Lhermite® EPX 700 is a manually fed electric punching machine designed for intensive uses. Offering flexibility of operation, high performance and easy adjustments, it is the ideal machine for busy finishing applications where automatic equipment is not justified.

**JB** JAMES BURN  
INTERNATIONAL  
DOCUMENT FINISHING SOLUTIONS



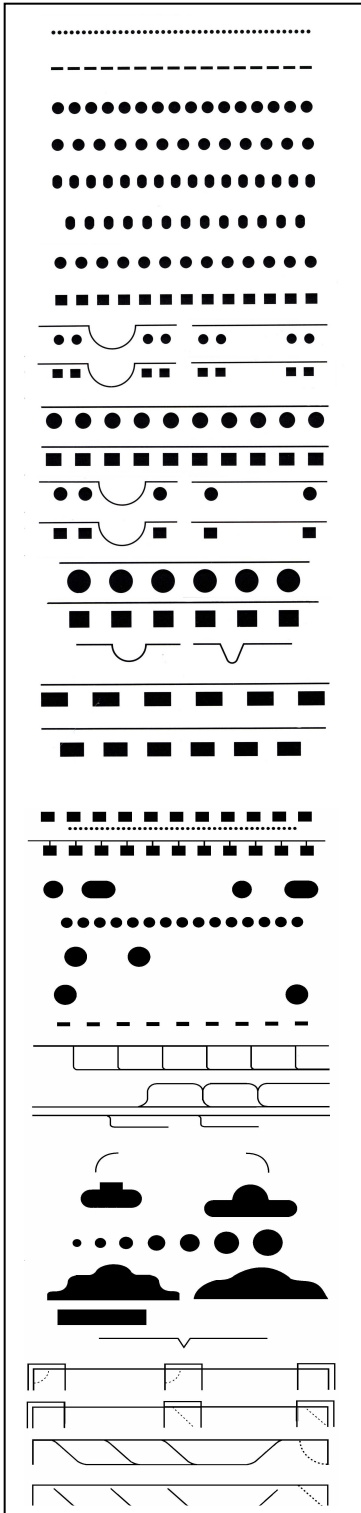

**JAMESBURN INTERNATIONAL**

FRANCE : 61300 L'Aigle- Tel: 33(0)233 842 150  
E-mail : info@jamesburn.fr

SINGAPORE: Singapore 787601-Tel:65 6846 944  
E-mail: jbispose@singnet.com.sg


ASIA : Hong Kong – Tel :852 2515 9928  
E-mail : info@jbiasia.com.hk

## FEATURES AND BENEFITS


- The **EPX 700** will accommodate a wide variety of applications:
  - Perforation lines for Wire-O® (with or without thumbcut), Unicoil®, metallic spiral, plastic comb, ring binder binding styles.
  - Tear off perforation & snap out.
  - T slot perforation.
  - Habilclass® perforation.
  - Velobind® perforation.
  - Index cutting.
  - Corner perforation & round cornering.
  - Scoring & creasing.
  - Punching holes of various shapes
- The **EPX 700** is a free standing machine with a generous working area. Its small footprint allows easy installation in busy work locations.
- The strength and high quality of the punching tools ensure long term punching accuracy & work quality.
- A major advantage of the **EPX 700** is the interchangeability of its punching tools with EX610 automatic punching machines.
- Tool changes are simple and take less than 5 minutes.

- **Value for money:**  
EPX 700 Wire-O® punching tools are available in ½ size so they can be combined to punch perforation lines with or without thumbcut on the full width of the machine.



330 mm tool with thumbcut



330 mm tool without thumbcut



Possible tool combinations



## MAIN TECHNICAL CHARACTERISTICS

Max sheet / punching width	700mm (27.5'') / 660mm (26'')
Punching capacity	Up to 3mm
Index & tab width	8 to 20mm
Scoring width	0.5mm
Creasing width	2.5mm
Mechanical speed	90 cycles / minute
Front & rear table depth	400mm
Voltage	220/380 3 phases / 50Hz
Dimensions	1,000 x 950 x 1,150(H) mm
Net weight	300kg

**JBI authorized distributor**